


Hexagon nuts countersunk on both sides

DIN 2510-NF

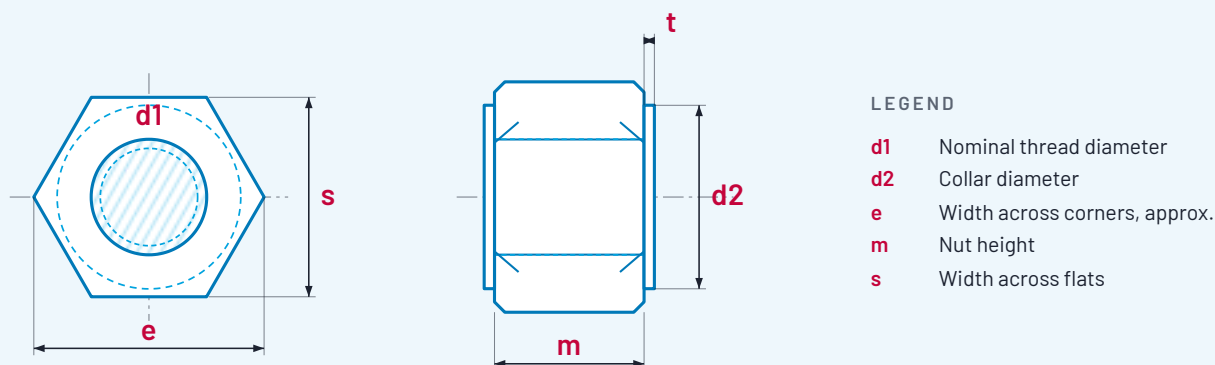

DIMENSIONS IN MM

THREAD D1	D2	D3	E ≈	M	S	T	WEIGHT KG / PIECE ≈
M12	21	14.5	24	12	22	2	0.031
M16	26	18.5	30	16	27	2	0.052
M20	31	22.5	35.5	20	32	2	0.086
M24	35	26.5	39.5	24	36	3	0.124
M27	40	30.5	45.5	27	41	3	0.181
M30	45	33.5	51	30	46	3	0.26
M33	49	36.5	55.5	33	50	3	0.33
M36	53.5	39.5	61	36	55	3	0.425
M39	58.5	42.5	66.5	39	60	3	0.56
M42	63.5	45.5	72.5	42	65	3	0.705
M45	68.5	49.5	78	45	70	3	0.9
M48	73.5	53.5	83.5	48	75	4	1.12
M52	78.5	57.5	89.5	52	80	4	1.34
M56	83.5	63	95	56	85	4	1.59
M64	93.5	71	106	64	95	4	2.23
M72 × 6	103.5	79	117.5	72	105	4	2.98
M80 × 6	113.5	87	129	80	115	4	3.85
M90 × 6	128	97	145.5	90	130	4	5.55
M100 × 6	143	107	162.5	100	145	5	7.7
M110 × 6	153	119	173.5	110	155	5	9.25
M120 × 6	168	129	191	120	170	5	13.1
M125 × 8	178	134	201	125	180	5	14.9
M140 × 8	198	149	224	140	200	5	20.1
M150 × 8	208	159	235.5	150	210	5	22.8
M160 × 8	218	174	247.3	160	220	5	26
M170 × 8	228	180	258.6	170	230	5	29.4
M180 × 8	253	196	286.68	180	255	5	41

Grades and finishes: configure at hbsfasteners.nl/products/hex-nuts.